

塑胶为白色

技术规范:

额定电流 : 7AMP

适用温度 : -40°C to +105°C

接触电阻 : 20mΩ Max



绝缘电阻 : 1000MΩ Min

耐电压 : AC 500V

绝缘材料 : Polyester (UL94V-0)  
Standard: LCP+GF30


端子材质 : Brass

电镀规范 : Au or Sn Over 50u" Ni

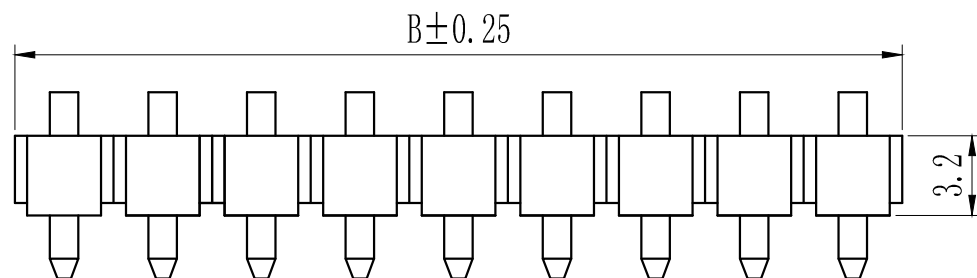

Pin数	尺寸A	尺寸B
1		3.96
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

PCB LAYOUT

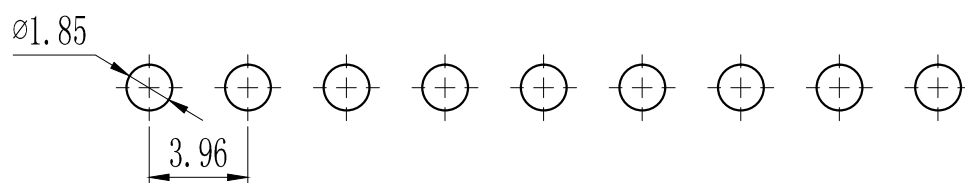

P a-10-1-2-5p-a-a-s-0									
排针系列	间距	塑高	双塑	单排	PIN位	电镀	材质	角度	备注
	a-0.8mm	1.0-10	1-单塑	1-单排	1*40P/50P	A-1u"	A-PBT	S=180°	0-3.0
	b-1.0mm	1.5-15	2-双塑	2-双排	2*40/50P	B-3u"	B-PA46	B=90°	1-3.0/6.0(双塑)
	c-1.27mm	2.0-20	3-三塑	3-三排	3*40/50P	C-5u"	C-P16T	M=SMT	2-3.0/3.0(双塑)
	d-2.0mm	2.54-254		4-四排	4*40/50P	D-10u"	D-PA9T	Z-Z型	3-2.8/4.0(双塑)
	e-2.5mm	4.3-43				E-15u"	E-LCP	Y=135°	4-2.6/3.5(双塑)
	f-2.54mm	7.4-74				F-30u"		L=卧式SMT	其它另做说明
	g-3.96mm					S-镀锡			
	h-5.08mm					H-半金锡			

TOLERANCE:

.X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 \_\_\_\_\_  
日期 \_\_\_\_\_  
审核 \_\_\_\_\_  
日期 \_\_\_\_\_

客户确认

承认 \_\_\_\_\_ 日期 \_\_\_\_\_

驳回 \_\_\_\_\_ 日期 \_\_\_\_\_

3.96mm单排针, 180°, 塑高3.2mm

Spec: 3.96mm Pin Header, Single Row, Right Angle

Positions: 1x1~1x20

Plastic Height: 3.2mm