


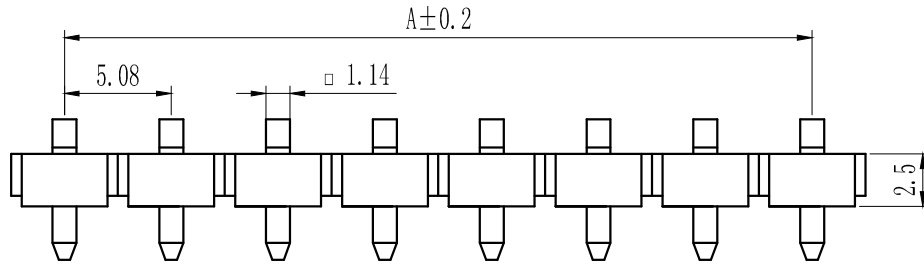


Pin数	尺寸A	尺寸B
1		5.08
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96
13	60.96	66.04
14	66.04	71.12
15	71.12	76.20
16	76.20	81.28
17	81.28	86.36
18	86.36	91.44
19	91.44	96.52
20	96.52	101.6

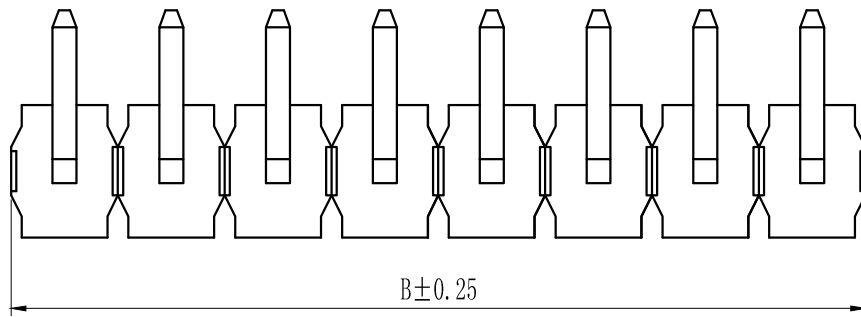

塑胶为白色

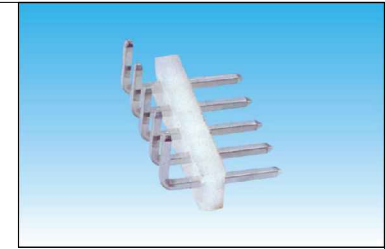

技术规范:

额定电流 : 7AMP

适用温度 : -40°C to +105°C

接触电阻 : 20mΩ Max

绝缘电阻 : 1000MΩ Min


耐电压 : AC 500V

绝缘材料 : Polyester (UL94V-0)
Standard: LCP+GF30

端子材质 : Brass

电镀规范 : Au or Sn Over 50u" Ni

PCB LAYOUT

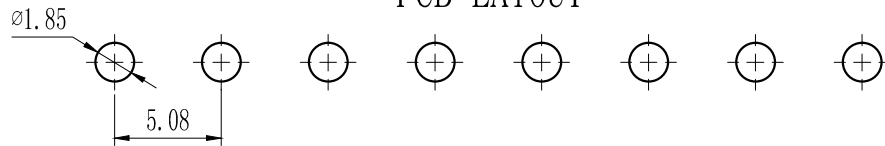

排针系列	间距	塑高	双塑	单排	PIN位	电镀	材质	角度	备注
	a=0.8mm	1.0-10	1-单塑	1-单排	1~40P/50P	A-1u"	A-PBT	S=180°	0-3.0
	b=1.0mm	1.5-15	2-双塑	2-双排	2~40/50P	B-3u"	B-PA46	R=90°	1-3.0/6.0(双塑)
	c=1.27mm	2.0-20	3-三塑	3-三排	3~40/50P	C-5u"	C-PA6T	M-SMT	2-3.0/3.0(双塑)
	d=2.0mm	2.54-254		4-四排	4~40/50P	D-10u"	D-PA9T	Z-Z型	3-2.8/4.0(双塑)
	e=2.5mm	4.3-43				E-15u"	E-LCP	Y=135°	4-2.6/3.5(双塑)
	f=2.54mm	7.4-74				F-30u"		L=卧式SMT	其它另做说明
	g=3.96mm					S-镀锡			
	h=5.08mm					II-半金锡			

客户确认

姓名: _____ 日期: _____

日期: _____

审核: _____ 日期: _____

日期: _____

承认 _____ 日期 _____

驳回 _____ 日期 _____

5.08mm单排针, 90°, 塑高2.5mm
Spec: 5.08mm Pin Header, Single Row, Right Angle
Positions: 1x1~1x20
Plastic Height: 2.5mm

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	

ST 上海狮拓电子科技有限公司

产品名稱: _____

产品料號: _____

THIRD ANGLE PROJECTION