


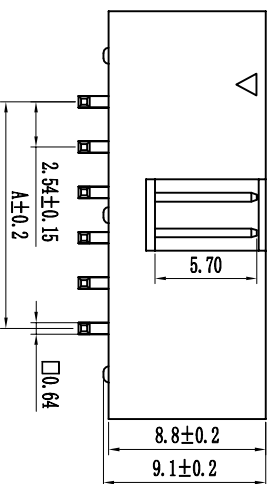



| | | | |
|------|-------|-------|-------|
| Pin# | R±H | R±B | R±C |
| 2x3 | 5.08 | 12.94 | 15.24 |
| 2x4 | 7.62 | 15.48 | 17.78 |
| 2x5 | 10.16 | 18.02 | 20.32 |
| 2x6 | 12.70 | 20.56 | 22.86 |
| 2x7 | 15.24 | 23.10 | 25.40 |
| 2x8 | 17.78 | 25.64 | 27.94 |
| 2x9 | 20.32 | 28.18 | 30.48 |
| 2x10 | 22.86 | 30.72 | 33.02 |
| 2x11 | 25.40 | 33.26 | 35.56 |
| 2x12 | 27.94 | 35.80 | 38.10 |
| 2x13 | 30.48 | 38.34 | 40.64 |
| 2x14 | 33.02 | 40.88 | 43.18 |
| 2x15 | 35.56 | 43.42 | 45.72 |
| 2x16 | 38.10 | 45.96 | 48.26 |
| 2x17 | 40.64 | 48.50 | 50.80 |
| 2x18 | 43.18 | 51.04 | 53.34 |
| 2x19 | 45.72 | 53.58 | 55.88 |
| 2x20 | 48.26 | 56.12 | 58.42 |
| 2x21 | 50.80 | 58.66 | 60.96 |
| 2x22 | 53.34 | 61.20 | 63.50 |
| 2x23 | 55.88 | 63.74 | 66.04 |
| 2x24 | 58.42 | 66.28 | 68.58 |
| 2x25 | 60.96 | 68.82 | 71.12 |
| 2x26 | 63.50 | 71.36 | 73.66 |
| 2x27 | 66.04 | 73.90 | 76.20 |
| 2x28 | 68.58 | 76.44 | 78.74 |
| 2x29 | 71.12 | 78.98 | 81.28 |
| 2x30 | 73.66 | 81.52 | 83.82 |
| 2x31 | 76.20 | 84.06 | 86.36 |
| 2x32 | 78.74 | 86.60 | 88.90 |

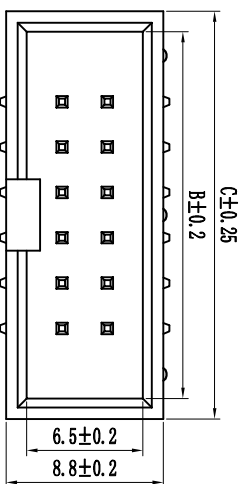

PCB LAYOUT

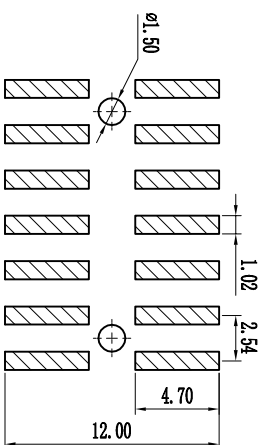

技术规范:
 额定电流 : 3AMP
 适用温度 : -40°C to +105°C
 接触电阻 : 20m Ω Max
 绝缘电阻 : 1000M Ω Min
 耐电压 : AC1000V
 绝缘材料 : Polyester (UL94V-0)
 Standard: PA6T
 端子材质 : Brass
 电镀规范 : Au or Sn Over 50u" Ni

| 插接系列 | 间距 | 插点 | 双插 | 单插 | Pin数 | 电镀 | 材质 | 角度 | 端子 | 备注 |
|------|----------|-----|------|------|-----------|--------|--------|--------|------------|----------------|
| F | a-10 | 1-1 | 2-2 | 5p | a-a | s | D | 0 | | |
| | a-10mm | | 1-单插 | 1-单插 | 1"40P/50P | A-10" | A-10" | S-100° | 12.5mm间距25 | 0-3.0 |
| | b-1.0mm | | 2-双插 | 2-双插 | 2"40P/50P | B-50" | B-50" | R-90° | 11.0mm间距18 | 1-3.0/0.6 (双插) |
| | c-1.27mm | | 3-三插 | 3-三插 | 3"40P/50P | C-75" | C-75" | D-90° | 12.2mm间距22 | 2-3.0/0.3 (双插) |
| | d-2.0mm | | 4-四插 | 4-四插 | 4"40P/50P | D-100" | D-100" | E-90° | 100-非焊接端子 | 2-2.0/0.4 (双插) |
| | e-2.5mm | | | | 5"40P/50P | E-125" | E-125" | F-135° | 100-非焊接端子 | 2-2.0/0.3 (双插) |
| | f-3.0mm | | | | 6"40P/50P | F-150" | F-150" | G-150° | 100-非焊接端子 | 其它另做说明 |
| | h-5.0mm | | | | | H-50" | H-50" | | 100-非焊接端子 | |
| | | | | | | H-50" | H-50" | | | |
| | | | | | | | | | | 注: 长插时以插针计 |



上海狮拓电子科技有限公司

TOLERANCE:

| | |
|------|-------|
| X | ±0.05 |
| XX | ±0.10 |
| ANG. | |

产品名称:
产品料号:

THIRD ANGLE PROJECTION

客户确认

姓名: _____
日期: _____
审核: _____
日期: _____

□ 承辦 _____ 日期: _____
□ 退回 _____ 日期: _____

2.54间距筒牛, SMT, 塑高8.8mm
Spec: 2.54mm Box Header, SMT
Positions: 6*64
Plastic Height: 8.8mm