


Pin数	尺寸A	尺寸B	尺寸C
2X6	6.35	27.32	14.42
2X8	8.89	29.86	16.96
2X10	11.43	32.40	19.50
2X12	13.97	34.94	22.04
2X14	16.51	37.48	24.58
2X16	19.05	40.02	27.12
2X18	21.59	42.56	29.66
2X20	24.13	45.10	32.20
2X22	26.67	47.64	34.74
2X24	29.21	50.18	37.28
2X26	31.75	52.72	39.82
2X28	34.29	55.26	42.36
2X30	36.83	57.80	44.90
2X32	39.37	60.34	47.44
2X34	41.91	62.88	49.98
2X36	44.45	65.42	52.52
2X38	46.99	67.96	55.06
2X40	49.53	70.50	57.60
2X42	52.07	73.04	60.14
2X44	54.61	75.58	62.68
2X46	57.15	78.12	65.22
2X48	59.69	80.66	67.76
2X50	62.23	83.20	70.30
2X52	64.77	85.74	72.84
2X54	67.31	88.28	75.38
2X56	69.85	90.82	77.92
2X58	72.39	93.36	80.46
2X60	74.93	95.90	83.00

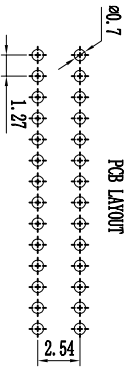

技术规范：  
 额定电流：1AMP  
 适用温度：-40℃to+105℃  
 接触电阻：20mΩ Max  
 绝缘电阻：1000MΩ Min  
 耐电压：AC 500V  
 绝缘材料：Polyester (UL94V-0)  
 Standard:PBT  
 端子材质：Brass  
 电镀规范：Au or Sn Over 50u" Ni

引脚类别	间距	镀层	焊料	焊盘	角度	端子	备注
c-1 0.6mm	1-单排	1-镀层	1-单排	1"90°/50°	B-10°	S-180°	0-3.0
b-1 1.0mm	2-双排	2-双排	2-双排	2"90°/50°	B-30°	R-90°	1-3.0/0.6 (双排)
c-1 1.27mm	3-三排	3-三排	3-三排	3"90°/50°	C-50°	C-180°	11.0mm间距18
d-2 1.0mm	4-四排	4-四排	4-四排	4"90°/50°	D-100°	D-180°	12.2mm间距22
f-2 0.5mm					F-150°	F-180°	100#非排插端子
f-3 0.6mm					F-90°	S-180°	100#排插端子
h-5 0.6mm					H-45°	H-180°	100#非排插面插端子
							其它另做说明
							100#排插面插端子
							注：长插时以斜杆计

STO 上海狮拓电子科技有限公司

TOLERANCE:

X	±0.05
.XX	±0.10
ANG.	

产品名称:  
产品料号:

THIRD ANGLE PROJECTION

客户确认

姓名: \_\_\_\_\_ 日期: \_\_\_\_\_

日期: \_\_\_\_\_

日期: \_\_\_\_\_

日期: \_\_\_\_\_

1.27mm X 2.54mm 间距牛角, 180°, 立高10.5mm  
 Spec: 1.27mm Ejector Header, Dual Row, 180°  
 Positions: 2X6"2X40  
 Plastics Height: 10.5mm