

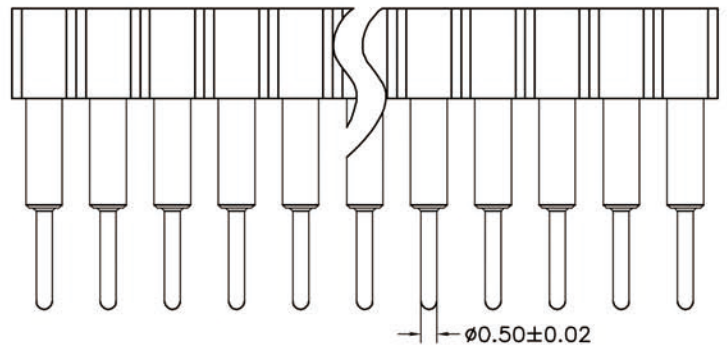


A B C D E

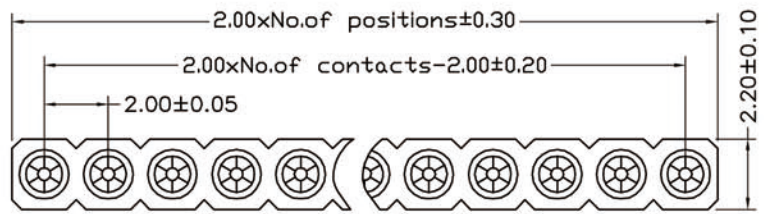

P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2µm/80µm"NI, 5µm/200µm"Sn

Gold Plated:2µm"/80µm"Ni, 0.8µ" gold

Plating(Contact):2µm/80µm"NI,gold or Tin plated

Insuiator:PPS UL94V-0

ClIp(Contact 6 Flnger):Beryllium copper,heat teated

Mating pin□:0.40mm/0.66mm

Electrical:

Current rating:3Amps/contact max.

Contact resistance:Max.10MΩ

Dlelectric strength:Min.1000V

Mechanical:

Average Insertion force with steel pin of □0.432:<90g

Average withdrawal force with steel pin of □0.432:>25g

Mechanical lige:min 500 cycle

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

產品名稱:
產品料號:

THIRD ANGLE PROJECTION

簽名	_____
日期	_____
審核	_____
日期	_____

客戶確認	
<input type="checkbox"/> 承認	_____ 日期 _____
<input type="checkbox"/> 駁回	_____ 日期 _____

STOC1-DXXXXXX0940B