
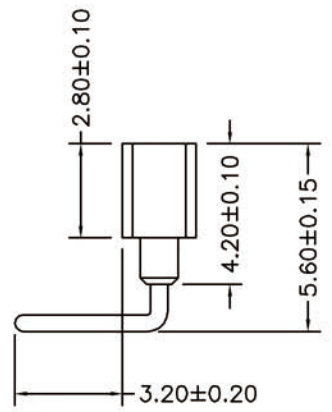
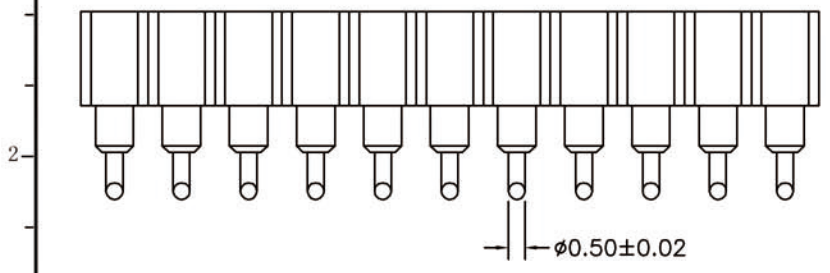


A B C D E

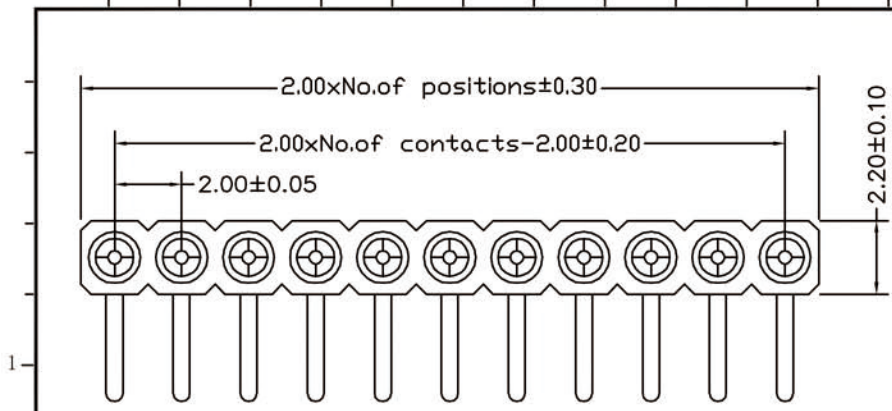

P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0.8μ" gold

Plating(Contact ):2μm/80μ"NI,gold or Tin plated

Insulator:PPS UL94V-0

ClIp(Contact 4 Flnger):Beryllium copper,heat teated

Mating pin□:0.40mm/0.66mm

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insulation resistance:≥1000MΩ at V=100V

Dleictric Withstanding Voltage:1000V AV Min

Operaling voltage:60VAC/DC

Mechanical:

-Insertion:0.7N typ

-Withdrawal:0.4N typ

Mechanical lige:min 500 cycle

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

TOLERANCE:

.X ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION

簽名  
日期  
審核  
日期

客戶確認  
承認 日期  
駁回 日期

STOC1-RXXXXXX0960B