
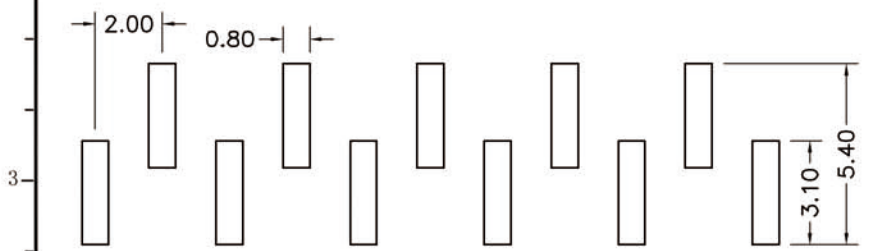
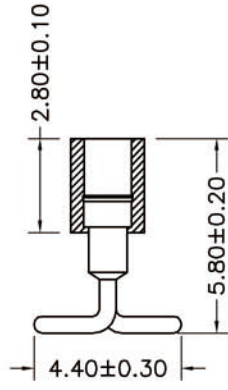
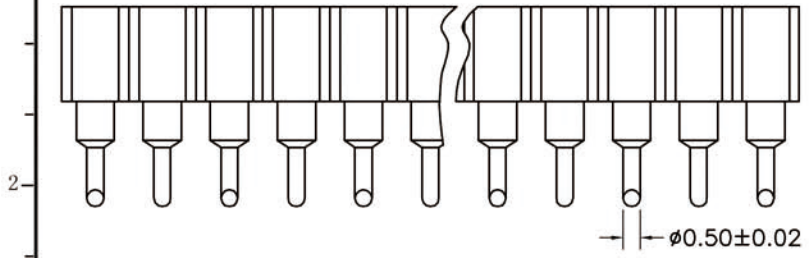


A B C D E

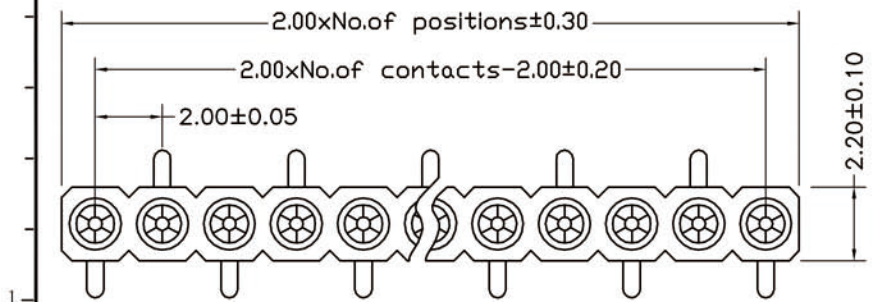

P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn
 Gold Plated:2μm"/80μm"Ni, 0.8μ" gold
 Plating(Contact):2μm/80μ"NI,gold or Tin plated
 Insulator:PPS UL94V-0
 Clip(Contact 6 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.
 Contact resistance:≤4mΩ/contact
 Insulation resistance:≥1000MΩ at V=100V
 Operating voltage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of □0.43:<75g
 Average withdrawal force with steel pin of □0.66:>25g
 Mechanical life cycle:min 200
 Operating temperature:-40° C to+105° C
 Soldering temperature:+255° C

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

產品名稱:
產品料號:

THIRD ANGLE PROJECTION

簽名 _____
日期 _____
審核 _____
日期 _____

客戶確認
 承認 _____ 日期 _____
 駁回 _____ 日期 _____

STOC1-SXXXXXX0740B