





A B C D E

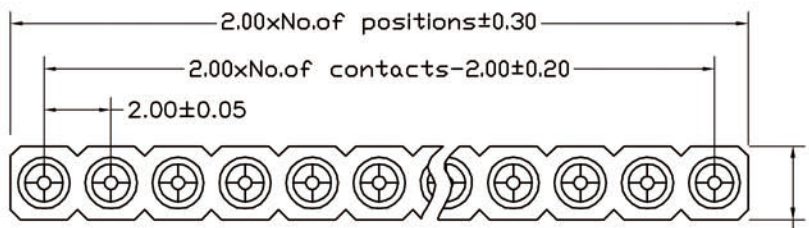

2.20±0.10

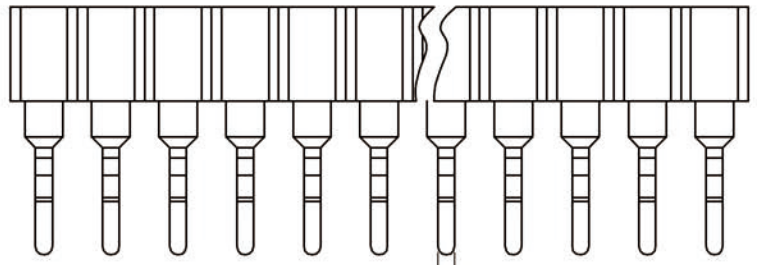

∅0.50±0.02

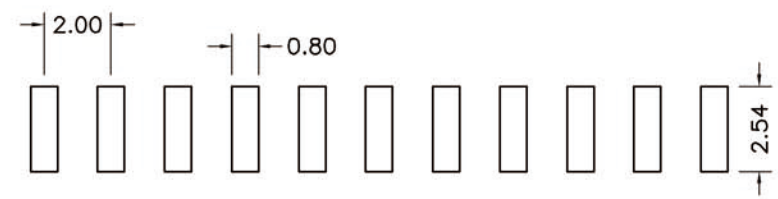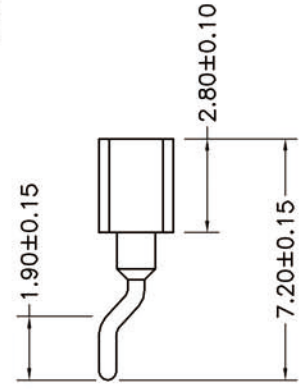

P. C. B LAYOUT

Technical Data

Material:
 Pin(outer sleeve):Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin Plated:2µm/80µm"NI, 5µm/200µ"Sn
 Gold Plated:2µm"/80µm"Ni, 0.8µ" gold
 Plating(Contact):2µm/80µ"NI, gold or Tin plated
 Insuiator:PPS UL94V-0
 Cl1p(Contact 6 Flnger):Beryllium copper,heat teated
 Mating pin□:0.40mm/0.66mm

Electrical:

Current rating:3Amps/contact max.
 Contact resistance:Max.10MΩ
 Dlelectric strength:Min.1000V

Mechanical:

Average Insertion force with steel pin of □0.432:<90g
 Average withdrawal force with steel pin of □0.432:>25g
 Mechanical lige:min 500 cycle
 Operaling temperature:-40° C to+105° C
 Soldering temperature:+255° C

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

產品名稱:
 產品料號:

THIRD ANGLE PROJECTION

簽名	_____
日期	_____
審核	_____
日期	_____

客戶確認	
<input type="checkbox"/> 承認	日期 _____
<input type="checkbox"/> 駁回	日期 _____

STOC1-WXXXXXX0740B