
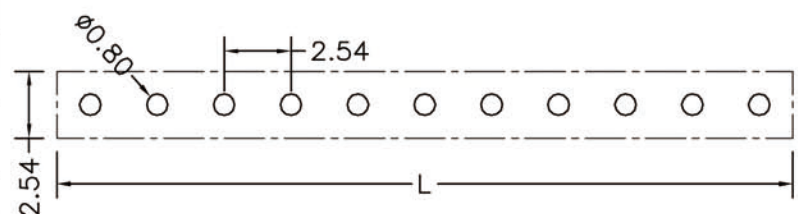
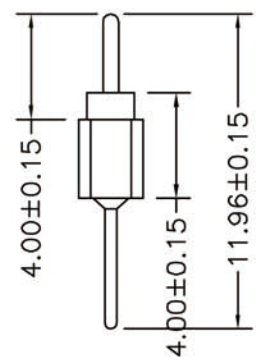
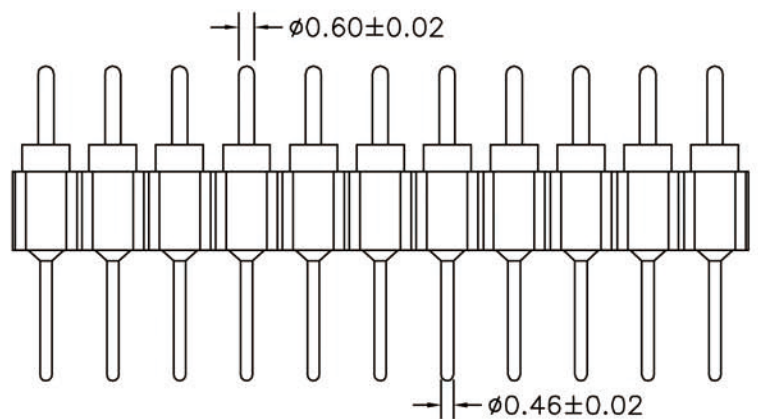


A B C D E

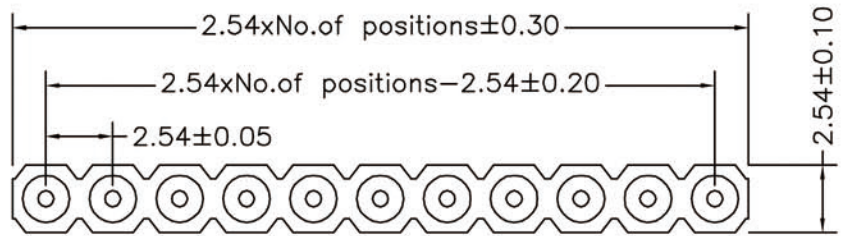

P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve): Brass, machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:  $2\mu\text{m}/80\mu\text{m}$  Ni,  $5\mu\text{m}/200\mu$  Sn

Gold Plated:  $2\mu\text{m}$  /  $80\mu\text{m}$  Ni,  $0.8\mu$  gold

Insulator: PPS UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance:  $\leq 4\text{m}\Omega$ /contact

Insulation resistance:  $\geq 1000\text{M}\Omega$  at  $V=100\text{V}$

Dielectric Withstanding Voltage: 1000V AV Min

Operating voltage: 60VAC/DC

Mechanical:

Operating temperature:  $-40^\circ\text{C}$  to  $+105^\circ\text{C}$

Soldering temperature:  $+255^\circ\text{C}$

Critical Dimensions: (\*)

TOLERANCE:
X. $\pm\text{XXX}$
.X $\pm 0.20$
.XX $\pm 0.10$
ANG.



上海狮拓电子科技有限公司

產品名稱:  
產品料號:

THIRD ANGLE PROJECTION

簽名 \_\_\_\_\_  
日期 \_\_\_\_\_  
審核 \_\_\_\_\_  
日期 \_\_\_\_\_

客戶確認  
 承認 \_\_\_\_\_ 日期 \_\_\_\_\_  
 駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

STOD1-DXXXX1196A-1