
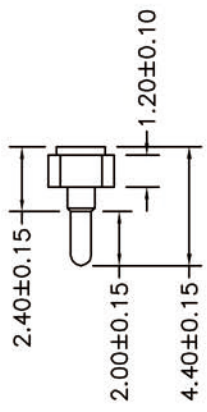
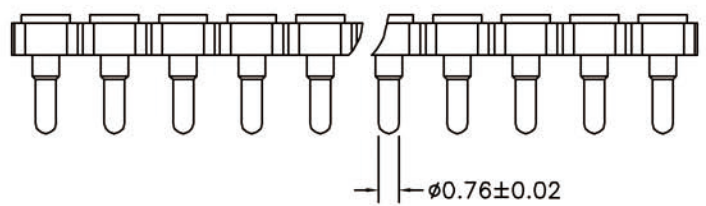


A B C D E

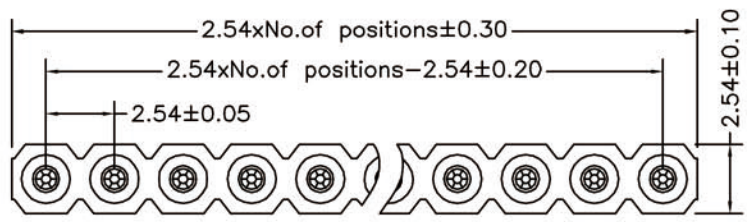

P. C. B LAYOUT

Technical Data

Material:
 Pin(outer sleeve):Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin Plated:2µm/80µm^{NI}, 5µm/200µ^{Sn}
 Gold Plated:2µm^{NI}/80µm^{Ni}, 0.8µ^{gold}
 Plating(Contact):2µm/80µ^{NI}, gold or Tin plated
 Insuiator:PPS UL94V-0
 ClIp(Contact 6 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.
 Contact resistance:≤4mΩ/contact
 Insuiation resistance:≥1000MΩ at V=100V
 Dielectric Withstanding Voltage:1000V AV Min
 Operating voltage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of Ø0.66mm/0.38":<60g
 Average withdrawal force with steel pin of Ø0.66mm/0.38":<15g
 Mechanical life cycle:min 200
 Operating temperature:-40 ° C to+105 ° C
 Soldering temperature:+255 ° C

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

產品名稱:
 產品料號:

THIRD ANGLE PROJECTION

簽名	_____
日期	_____
審核	_____
日期	_____

客戶確認	
<input type="checkbox"/> 承認	日期 _____
<input type="checkbox"/> 駁回	日期 _____

STOD1-DXXXXXX0440B