
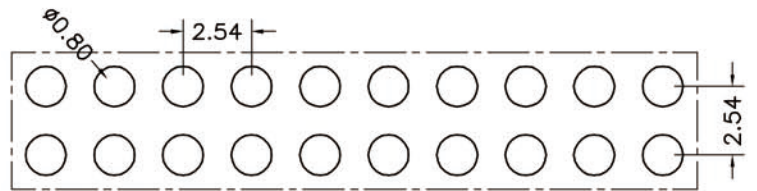
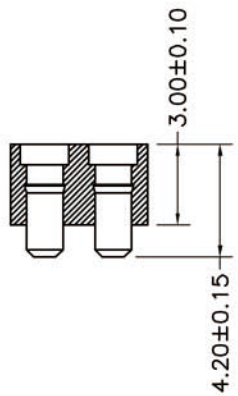
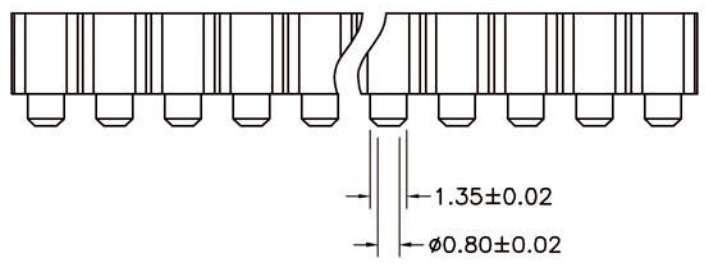


A B C D E

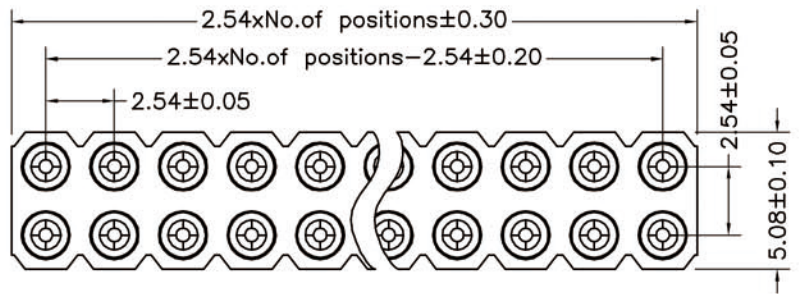

P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2µm/80µm"NI, 5µm/200µ"Sn

Gold Plated:2µm"/80µm"Ni, 0.8µ" gold

Plating(Contact):2µm/80µm"NI, gold or Tin plated

Insuiator:PPS UL94V-0

ClIp(Contact 4 Flnger):Beryllium copper,heat treated

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4m Ω/contact

Insuiation resistance:≥1000M Ω at V=100V

Dleiectrlc Withstanding Voltage:1000V AV Min

Operaling voltage:60VAC/DC

Mechanical:

Average Insertlon force with steel pin of Ø0.66mm/0.38":<250g

Average withdrawal force with steel pin of Ø0.66mm/0.38":<70g

Mechanical lige cycle:min 200

Operaling temperature:-40 ° C to+105 ° C

Soldering temperature:+255 ° C

TOLERANCE:
.X ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

產品名稱: _____

產品料號: _____

THIRD ANGLE PROJECTION

簽名 _____
日期 _____
審核 _____
日期 _____

客戶確認	
<input type="checkbox"/> 承認 _____	日期 _____
<input type="checkbox"/> 駁回 _____	日期 _____

STOD2-DXXXXXX0420B