
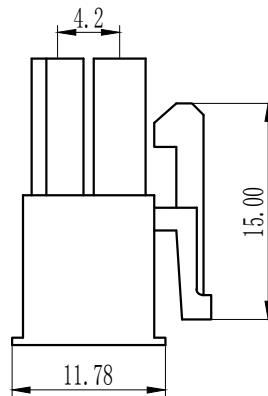
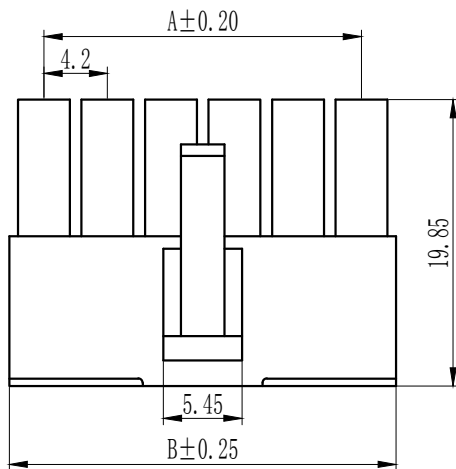


Pin数	尺寸A	尺寸B
2	4.20	5.50
3	8.40	9.70
4	12.60	13.90
5	16.80	22.30
6	21.00	26.50
7	25.20	30.70
8	29.40	34.90
9	33.60	39.10
10	37.80	43.30
11	42.00	47.50
12	46.20	51.70

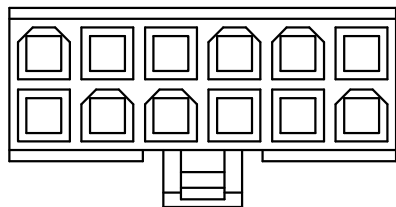

技术参数 SPECIFICATIONS

- ◆间距: 4.2 Pitch:4.2
- ◆适用线规: AWG#22-#28  
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)  
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 5A, AC, DC  
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute  
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ  
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ  
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-2  
Insulator:Nylon66 UL94-2

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 \_\_\_\_\_

日期 \_\_\_\_\_

审核 \_\_\_\_\_

日期 \_\_\_\_\_

客户确认

承认 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_

5557-nY